


STYLE SW2500 / 2400 / 2900 / 2600

Style SW2500
(1% open)

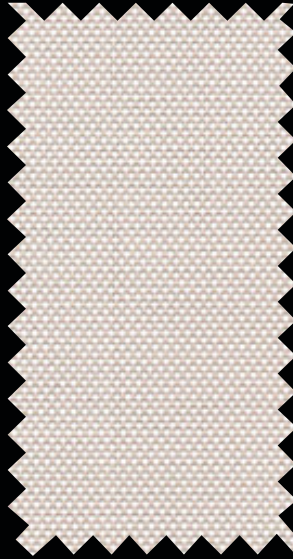

SW2520
P13 Oyster / Beige

Style SW2400 (2410)
(3% open)




SW2420
P84 Oyster / Beige

Style SW2900 (2390)
(5% open)



SW2920
P13 Oyster / Beige

Style SW2600 (2360)
(10% open)

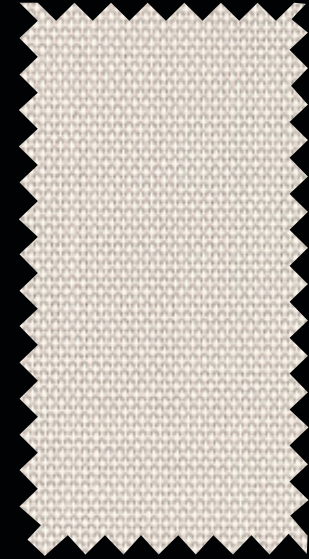


SW2620
P13 Oyster / Beige


The above styles are also available in the colors shown below.



P84 Brite White




P12 Oyster



P14 Oyster / Pearl Gray



Q20 Beige




Q21 Beige / Pearl Gray



V20 Pearl Gray



V32 Charcoal / Alpaca



V22 Charcoal / Gray



V24 Charcoal / Chestnut



V21 Charcoal

Sheerweave® Style SW2500 / 2400₍₂₄₁₀₎ / 2900₍₂₃₉₀₎ / 2600₍₂₃₆₀₎

Manufactured with ease of fabrication in mind, Styles 2500, 2400(2410), 2900(2390) and 2600(2360) are full basketweaves designed expressly for those applications which require a more opaque and nondirectional fabric. Styles 2500, 2400(2410), 2900(2390) and 2600(2360) can also be used in exterior roller shades.

SHEERWEAVE STYLE SW2500 / 2400 / 2900 / 2600

STANDARD WIDTH	2500, 2400(2410), 2900(2390) and 2600(2360): 63", 98" and 126" (160 cm, 248.9 cm and 320 cm).	FABRIC THICKNESS	2500: 0.024 in (0.61 mm) 2400(2410): 0.020 in (0.51 mm)	2900(2390): 0.017 in (0.43 mm) 2600(2360): 0.019 in (0.48 mm)
ROLL LENGTH	30 Linear Yards (27.4 lm)	OPENNESS FACTOR	2500: Approximately 1% 2400(2410): Approximately 3%	2900(2390): Approximately 5% 2600(2360): Approximately 10%
COMPOSITION	2500: 37% Fiberglass, 63% Vinyl on Fiberglass. 2400(2410) 2900(2390) and 2600(2360): 35% Fiberglass, 65% Vinyl on Fiberglass	UV BLOCKAGE	2500: Approximately 99% 2400(2410): Approximately 97%	2900(2390): Approximately 95% 2600(2360): Approximately 90%
MESH WEIGHT	2500: 16.2 oz/yd ² (549 g/m ²) 2400(2410): 14.1 oz/yd ² (478 g/m ²)	2900(2390): 11.8 oz/yd ² (400 g/m ²) 2600(2360): 10.4 oz/yd ² (353 g/m ²)	ACOUSTICAL VALUE	2500: NRC 0.55 / SAA 0.54 2400(2410): NRC 0.20 / SAA 0.21
			2900(2390): NRC 0.10 / SAA 0.12 2600(2360): NRC 0.05 / SAA 0.06	ACOUSTICAL PERFORMANCE
				NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a.

SPECIFICATIONS

FIRE CLASSIFICATION	2500 / 2600(2360) / 2400(2410) / 2900(2390): California U.S. Title 19 (small scale), NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), IBC Section 803.1.1 (Class A Rating), BS 5867 Part 2 Type B Performance, NFPA 701 TM#2 (large scale), CAN/ULC-S 109 (large and small scale), CAN/CGSB2-4.162-M80
BACTERIA AND FUNGAL RESISTANCE	ASTM E 2180, ASTM G21, ASTM G22, AATCC30 Part 3, ASTM D 3273, GREENGUARD Mold and Bacteria Standard ASTM 6329; includes Microban antimicrobial additives.
ENVIRONMENTAL CERTIFICATION	Certified to GREENGUARD and GREENGUARD Gold standards for low chemical emissions into indoor air during product usage.
SAFE USE	RoHS/Directive 2002/95/EC, US Consumer Product Safety Commission Section 101 and ANSI/WCMA A 100.1-2007 for lead content and REACH (EC 1907/2006) compliant.
STANDARD USES	Roller shades, Roman shades, and panel tracks.
WARRANTY	10-year interior, 5-year exterior.

TECHNICAL DATA

		SOLAR OPTICAL PROPERTIES																SHGC/G VALUE g-tot (glass & blind)							
		TS%				RS%				AS%				TV%				Single 1/4 CL				Insulating 1HA			
OPENNESS %		1%	3%	5%	10%	1%	3%	5%	10%	1%	3%	5%	10%	1%	3%	5%	10%	1%	3%	5%	10%	1%	3%	5%	10%
COLOR	NUMBER																								
Brite White	P84	15	18	22	27	72	69	67	62	13	12	11	11	14	17	20	25	0.26	0.28	0.30	0.33	0.20	0.21	0.22	0.24
Oyster	P12	15	17	21	27	68	64	61	57	17	19	18	16	13	12	14	21	0.26	0.30	0.30	0.35	0.21	0.22	0.23	0.24
Oyster / Beige	P13	10	11	17	24	60	55	54	51	30	34	29	25	9	8	12	19	0.31	0.32	0.35	0.37	0.23	0.23	0.24	0.26
Oyster / Pearl Gray	P14	7	9	14	20	50	44	45	45	43	47	41	35	6	7	10	16	0.35	0.38	0.39	0.41	0.25	0.26	0.27	0.27
Beige	Q20	7	10	14	19	50	48	47	44	43	42	39	37	6	7	10	16	0.36	0.37	0.40	0.43	0.25	0.26	0.27	0.28
Beige / Pearl Gray	Q21	5	7	11	17	42	39	38	39	53	54	51	44	5	5	9	15	0.39	0.42	0.43	0.44	0.27	0.28	0.29	0.30
Pearl Gray	V20	3	6	10	16	32	31	31	30	65	63	59	54	3	5	9	14	0.44	0.44	0.47	0.49	0.30	0.30	0.30	0.31
Charcoal	V21	1	3	4	10	4	3	4	4	95	94	92	86	1	3	5	11	0.59	0.60	0.60	0.62	0.37	0.37	0.37	0.37
Charcoal / Gray	V22	2	3	5	12	8	9	9	8	90	88	86	80	3	3	6	14	0.57	0.57	0.57	0.60	0.36	0.36	0.36	0.37
Charcoal / Chestnut	V24	1	3	6	11	6	6	6	5	93	91	88	84	1	3	6	12	0.59	0.58	0.59	0.61	0.37	0.37	0.37	0.37
Charcoal / Alpaca	V32	1	4	7	12	16	20	18	15	83	76	75	73	2	5	9	16	0.53	0.51	0.53	0.57	0.34	0.33	0.34	0.35



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



MIF Seal of Approval



101 Merrow Road | Auburn, ME 04210
800-858-5818 | SummerSpace.com

*TS - Solar Transmittance, RS - Solar Reflectance, AS - Solar Absorptance, TV - Visual Transmittance *SHGC = Solar Heat Gain Coefficient *1/4 CL = 1/4" Clear Glass, 1 HA = 1" Heat Absorbing Glass *Fabrics Installed Internally, Zero-Degree Profile Angle *Solar Heat Gain Coefficient (SHGC) shown calculated according to Office of Building Technology, State and Community Programs, Energy Efficiency and Renewable Energy, U.S. Department of Energy's definition of SHGC. SHGC represents the percentage of solar heat gain that is transmitted to the interior through the glass and shading system. If you are using glass whose performance is listed in terms of SC, you may convert to SHGC by multiplying the SC by 0.87.

PHIFER
INCORPORATED

® SheerWeave is a registered trademark of PHIFER INCORPORATED.
® MICROBAN is a registered trademark of Microban Products Company.
TM UL, the UL logos and the UL mark are trademarks of UL LLC.
© PHIFER INCORPORATED V19